


REV.	REVISION	DATE

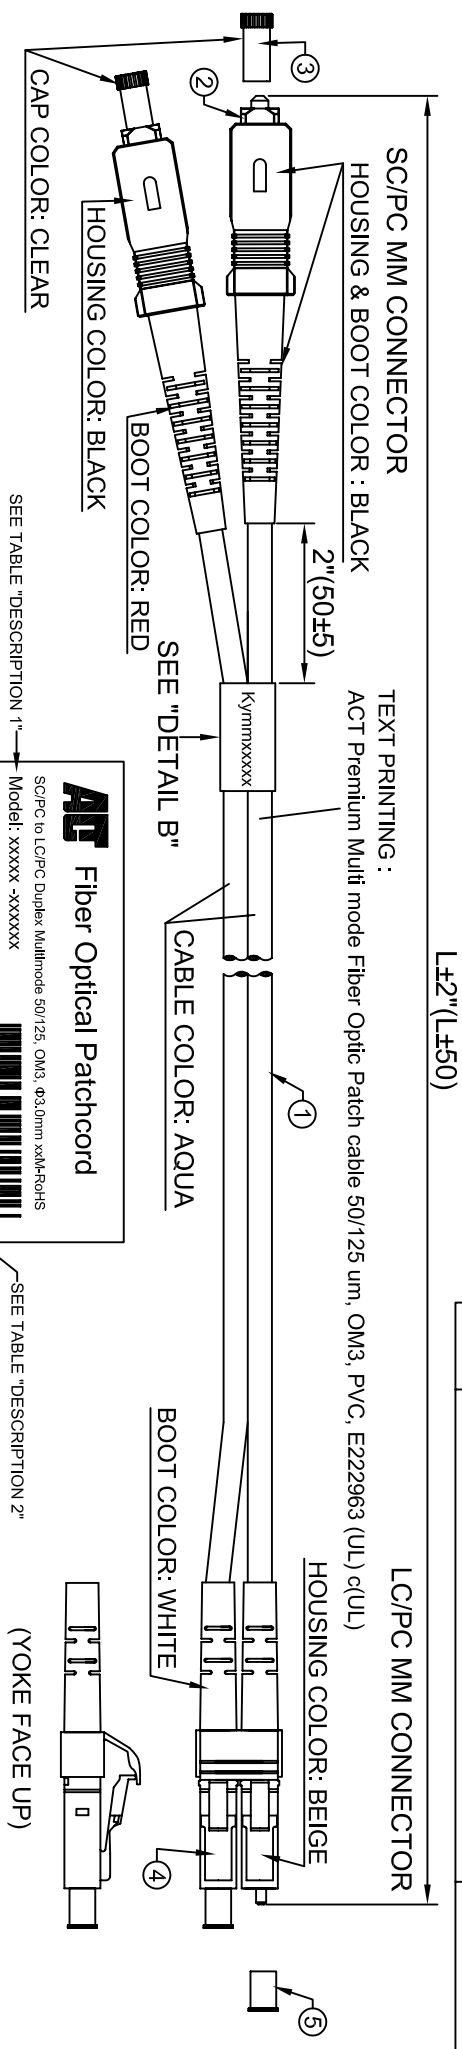

- NOTE:
1. INSERTION LOSS < 0.3dB.
 2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
 5. TENSILE SCRENGH: 10Kg.
 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TESC CARD
MEDIUM	POLYBAG	5 CABLES
LARGE	POLYBAG	ALL
EACH LARGE POLYBAG IN AN OUTER CARTON		

ACT

Fiber Optical Patchcord

SC/PC to LC/PC Duplex Multimode 50/125, OM3, Ø3.0mm xXH-RoHS

Model: xxxxx-xxxxxx

Lot number: xxxxxxxxxx

Performance: (@23℃) A=850/1310±20nm

Serial No

Insertion Loss ≤ 0.3dB

850nm

1310nm

A

B


C

D

Kymmmxxxx

Prepared By: _____


Date: _____




DETAIL B

y: Year; mm: Month

xxxxx: Serial Number

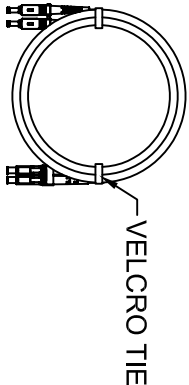

5	2PCS	LC DUST COVER, WHITE.
4	2SETS	CONNECTOR: LC/PC MM BEIGE HOUSING WITH WHITE BOOT.
3	2PCS	SC DUST COVER, CLEAR.
2	2SETS	CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.
1	1PC	CABLE: MULTIMODE, 50/125um, 3.0mm ZIPCORDER, OFNR, AQUA JACKET.
ITEM	QTY	PART NO.
DESCRIPTION		
PART LIST		

		UNIT:	TITLE:	
DRAWN BY Catherine		DATE 2008/3/3	PATCHCORD SC-LC MULTIMODE DUPLEX 50/125, OM3, 3.0mm, AQUA	
CHECKED BY		DATE	CUSCOMER	CUSCOMER PART NO.
APPROVED BY		DATE	DRAWING NO. PK802002	Ref. NO. RL86**
SCALE BY		DATE	TREINDEX PART NO.	REV. A

RL8650	50	50	164'(50000)	944250-RL8650	8716065229349
RL8630	30	30	98.4'(30000)	944230-RL8630	8716065229332
RL8620	20	20	65.6'(20000)	944220-RL8620	8716065229325
RL8615	15	15	49.2'(15000)	944215-RL8615	8716065229318
RL8610	10	10	32.8'(10000)	944210-RL8610	8716065229301
RL8605	05	5	16.4'(5000)	944205-RL8605	8716065229295
RL8603	03	3	9.84'(3000)	944203-RL8603	8716065229288
RL8602	02	2	6.56'(2000)	944202-RL8602	8716065229271
RL8651	51	1.5	4.92'(1500)	9442015-RL8651	8716065229264
RL8601	01	1	3.28'(1000)	944201-RL8601	8716065229257
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2

CUSCOMER APPROVAL:

DATE:

